

# CHAIN CONVEYOR





# CHAIN CONVEYOR






Double chain conveyor

## DETAILS

- Simple design for a minimum maintenance
- Entirely made of galvanized steel
- 2-years parts and labor warranty available as an option
- Multiple dimensions available to fit all needs
- Chains mounted on UHMW brackets - reduces noises and lengthens service life
- Several options available:
  - cover
  - drive unit cover
  - loading and unloading hopper
  - fixed or adjustable joint

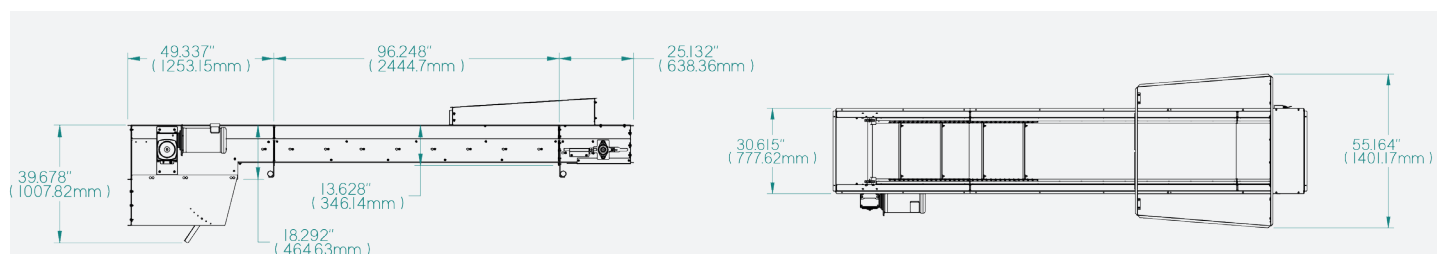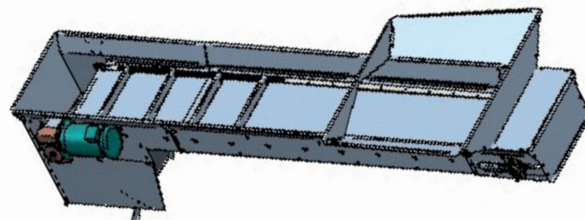

## AVAILABLE OPTIONS

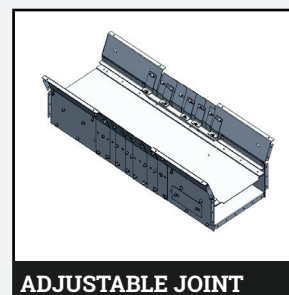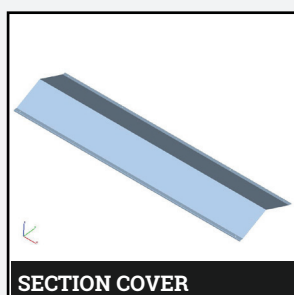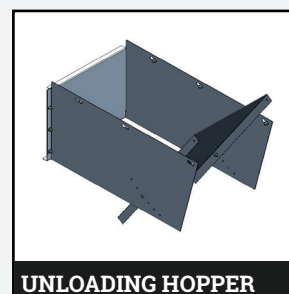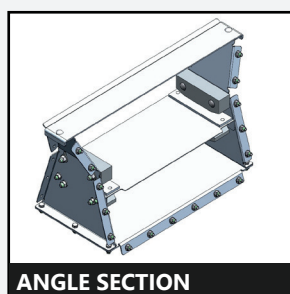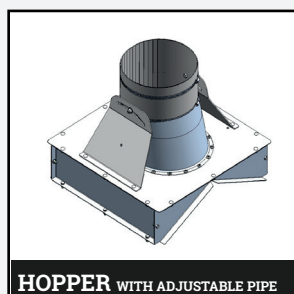

<b>SECTION</b>	Length of 1 (0.30 m), 2 (0.60 m), 4 (1.22 m) and 8 (2.43 m) feet
<b>MOTOR</b>	Motor 2 HP or 3HP (240 volt 60 Hz or 600 volt 60 Hz)
<b>CURVED SECTION</b>	Upward or downward adjustable joint - from 0 to 35 degrees Fixed joint - upwards - 35 degrees
<b>DRIVE MECHANISM</b>	Gearbox 10:1 or 15:1 (2 HP, 3HP or 5HP)
DRIVE UNIT DIMENSION	49" (124.5 cm)
BASE UNIT DIMENSION	23.9" (60.7 cm)
DRIVE MECHANISM DIMENSION	72" (183 cm)
<b>CHAIN</b>	662H chain
<b>WIDTH</b>	Available in 18" ( 45,7 cm) and 24" ( 60,9 cm)
<b>MAXIMAL LENGTH</b>	140 feet (42.7 m)*
<b>MAXIMAL ANGLE OF INSTALLATION</b>	Angle of 45 degrees*
<b>MAXIMAL DISTANCE BETWEEN SUPPORTS</b>	8 feet (2.43 m)*

\* These values could vary according to the configuration (rise, motor...) and other technical specifications.