

TMR MIXER

M40S




ROVIBEC
AGRI SOLUTIONS

M40S

DIRECT DRIVE MIXER

«PLUG & MIX» SERIES



Your dealer

DESCRIPTION

A «**Plug&Play**» conception.
A single unit, all-in and ready to use!




- Compact, efficient and energy-saving
- Made of Canadian steel 44W
- Tub covered with a **stainless steel liner** of 30" (76 cm)
- A **Hardox** auger
- A **Direct Drive** motor
- A **Heavy Duty** planetary
- An **enclosed** and lubrication free PTO
- An optional 2-years or 5-years warranty period, parts and labour

*A mixer from 353ft³ to 432ft³ designed to last:
more performance, less maintenance!*

DETAILS



HARDOX AUGER



SCALE





ELECTRIC CYLINDER



MANUAL CONTROL PANEL



ADJUSTABLE LEGS

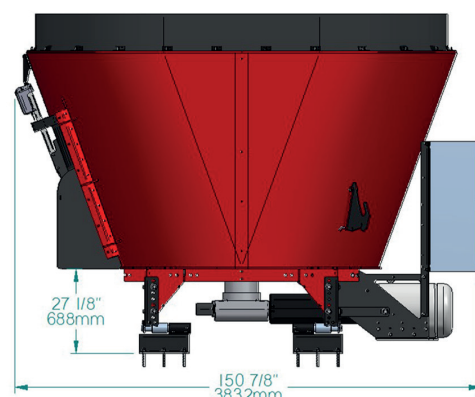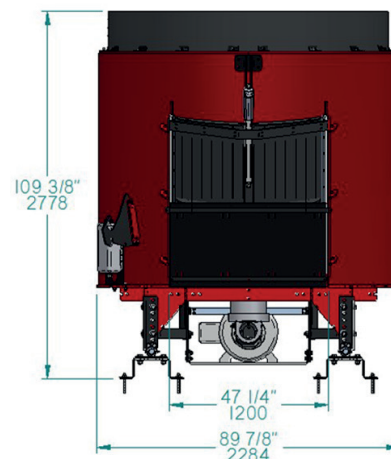

TECHNICAL SPECIFICATIONS

CAPACITY

353 pi³ (10m³) without extension
400pi³ (11.32m³) with 12" (30.5 cm) rubber extension
432pi³ (12.23m³) with 18" (45.7 cm) rubber extension

RUBBER EXTENSION

A 12" (30.5 cm) or 18" (45.7 cm) rubber extension is available as an option

MOTORIZATION

High efficiency Direct Drive motor with variable speed
40 HP as standard, 50HP as an option
Left, right or back motorization

CONTROL PANEL AND DRIVE

Manual panel 30 HP 40HP or 50 HP
Drive control up to 4 speeds motor for auger rotation

PLANETARY

Heavy Duty planetary

PTO

Enclosed PTO, lubrication free

SCALE AND LOADCELLS

DINAMICA or DIGISTAR balance and 4 loadcells, up to 10 000Lbs (4535 Kg)

DISCHARGE DOOR

The discharge door is controlled by an electric cylinder
1500 Lbs (680 Kg) torque with Amp management

KNIVES

6 knives and 2 strongbacks included

STEEL

Canadian steel 44W, 3/4" (19mm) thick for the floor and 1/4" (6mm) for the walls
Hardox auger 3/4" (19mm)

DIMENSIONS (L X l X H) WITHOUT EXTENSION

150" 7/8 X 89" 7/8 X 97" 3/8 (383,2 cm X 228,4 cm X 247.3 cm)

WEIGHT

7436 Lbs (3373 Kg)