TMR MIXER

PULL-TYPE



DESCRIPTION

A simple mixer, designed to last and have it done well and efficiently. An exceptional and proven mixing quality.

Available in 3 models, ranging from 440 to 900 cubic feet.

- 3/4" auger flighting in **44W steel**
- Stainless steel auger kicker plate
- 5 knives per auger, possibility up to 7
- Stainless steel liner inside the tub*
- Front centered door with hydraulic cylinder
- 2-sided hydraulic discharge conveyor
- *Heavy Duty* planetary
- A 2-years warranty (parts)*

*Conditions apply

DETAILS


STANDARD EQUIPMENT

- 5 knives per auger (4 tungsten, 2 strong backs and 1 vertical)
- 3/4" (19 mm) auger flighting in 44W steel
- Stainless steel auger kicker plate
- Manual restrictor plates
- 540 rpm or 1000 rpm PTO
- 3/4" (19 mm) floor and 1/4" (6 mm) walls in 44W steel
 42" (106 cm) front centered door
- 36" (91,5 cm) flat conveyor 8' (243 cm) hydraulic
- Left/right discharge
- Stainless steel conveyor pan & HD stainless steel chain
- 4 point scale system and scale
- Independent oil reservoirs QUICK-CONNECT

35 I/4" 1 895 4mm

30"

- Removable Hitch
- Viewing platform and safe ladder
- LED lights

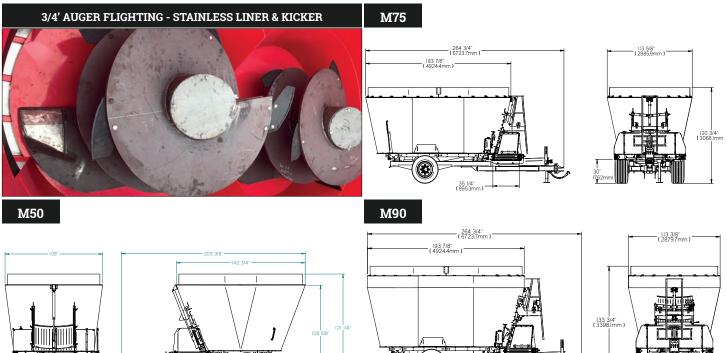

SPECIFICATIONS

CAPACITY STRUCK CAPACITY WITH 12" (30 CM) EXTENSION MAX PAYLOAD	■ M50 440 ft3 (12.5m3) 500 ft3 (14 m3) 10 000 Lbs (4 535 Kg)	M75 625 ft3 (18.4 750 ft3 (21 r 15 000 Lbs (n3)	■ M90 775 ft3 (21.4m3) 900 ft3 (24 m3) 17 600 Lbs (8 000 Kg)	
SCALE SYSTEM	4 load cells and DIGI-STAR EZ2500 or DYNAMICA DG400 scale				
DRIVE / PTO	540 RPM or 1000 RPM, C/V available as an option				
DISCHARGE GROUND CLEARANCE	M50 : 34" (86.4 cm)	M75 - M9	M75 - M90 : 36" (91,5 cm)		
TIRES	 M50: 2 tires 15.0/55R17 M75 - M90: 2 tires 445/4 				
MINIMUM POWER REQUIREMENT	■ M50 : 85 HP	M75 : 120 HP	M90 : 1	50 HP	
INCLUSIONS ADDED VERSION PRO	 24" stainless steel liner 2-years warranty (parts) 				
EMPTY WEIGHT	M50 : 10 500 Lbs (4 750	Kg) 🔳 M75: 15 000	Lbs (6 800 Kg)	M90 : 16 000 Lbs (7 300Kg	

